

Interflow's laminar airflow units excel at providing person protection, product protection or both. Interflow has fifty years of experience in the engineering, construction, validation and management of these products. Interflow's laminar airflow units are rated best for quality and value for money. In addition, our customers are enthusiastic about the delivery reliability and service. They also give the highest rating on commercial and technical support.

Cross flow unit

Product Protection



The cross flow unit series IF/CF is designed to protect the product in the working space from external air contamination. The operation of the cross flow unit is based on the principle of a horizontal, laminar air flow through the workspace.

- Manufactured from high-quality HPL material
- Standard stainless steel worktop (SS 304)
- Completely smooth executed both internally and externally
- Customised solutions possible
- Installation and validation on site
- Can be installed singly or in series

Safe to use

- Complies with IEST-RP-CC002.4 guideline
- Deployable in accordance with ISO and GMP standards
- CE-marking
- Fail-safe design
- Hermetic bonding
- Meets at least Class 5 according to ISO 14644-1

Comfortable


- Most silent in the market
- Homogeneous light
- Low heat load
- Ergonomic top design

User-friendly

- Easy to operate
- Effortless cleaning
- Pre-filter at the top is easy to replace
- Optimal air distribution
- Plug-and-Play
- Continuous air speed control, always the correct flow rate

Sustainable

- Up to 70% reduction in energy consumption thanks to energy-saving EC-motor
- Energy-saving LED lighting
- Day and night switch as standard

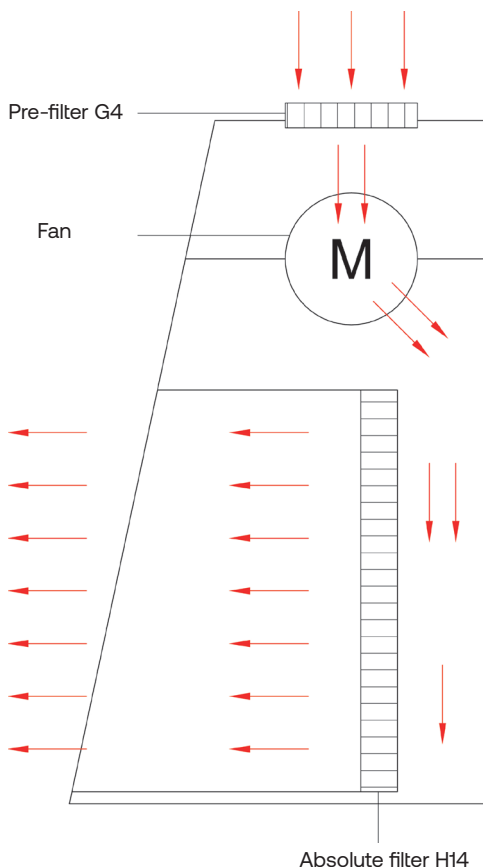

The cross-section on the left shows the working of the cross flow unit